


YPJSQ01JY



Product Overview

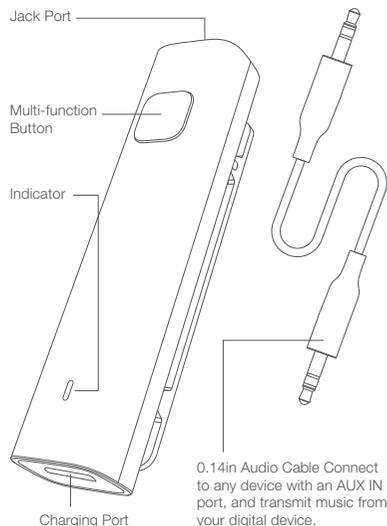

Turning on

Press and hold the multi-function button for 3 seconds, followed by one blue flash to turn on the receiver. If no connection record is detected, the red and blue lights flash alternately and the receiver waits for a connection. If connection records are detected, the blue light flashes twice and the receiver automatically pairs with the connected Bluetooth device, confirmed by blue light breathing. If the connection fails, the receiver enters standby mode with red and blue lights flashing alternately.

Turning off

Press and hold the multi-function button for 5 seconds to turn off the receiver.

Charging

During charging, the indicator light is red, and will turn off once fully charged. During charging when turned on, the receiver will reboot and reconnect to the Bluetooth device.

Connecting

- Connecting to a new Bluetooth device

When turned off, press and hold the multi-function button for 5 seconds, followed by red and blue light flashing alternately, and the receiver is ready to be connected. Locate and connect to Mi Bluetooth Audio Receiver. If your phone prompts for a password, enter "0000". Confirmed by blue light breathing. If the receiver fails to connect to any

Bluetooth device in 5 seconds, it will turn off automatically. When the receiver is turned on and connected to a Bluetooth device, press and hold the multi-function button for 3 seconds to enter standby mode with red and blue lights flashing alternately.

- Connecting to 2 phones
When phone A is connected to the receiver, press and hold the multi-function button for 3 seconds to enter standby mode. Then locate and connect the receiver in phone B. When phone B is connected, select Mi Bluetooth Audio Receiver in phone A to complete connection to 2 phones.

- Clearing connection records
Press the multi-function button 5 times continuously to clear connection records.

- Connection lost
When your phone turns off Bluetooth feature or is out of wireless range, the receiver automatically enters standby mode, and will turn off when not connected to any device in 5 minutes.

Functions



Call playing*:
 Answer calls: press
 Reject calls: press and hold for 2 seconds
 Last number redial: press twice
 Call waiting:
 Press to put the current call on hold to answer the incoming one.
 Press and hold for 2 seconds to continue the current call and reject the incoming one.
 Switch between calls:
 When answering two calls, press twice to switch between calls.
 Music playing
 Play/Pause: press
 Track forward: press twice
 Track backward: press 3 times

* Answer calls using the microphone on your headset or phone.

Specifications

Model: YPJSQ01JY	Wireless connectivity: Bluetooth 4.2
Input: 5V ⎓ 1A	Bluetooth profiles:
Weight: 0.35oz	HFP/HSP/A2DP/AVRCP
Wireless range: 393.7in	Charging port: Micro-USB
Charging time: 2h	FCC ID: 2AN5MYPJSQ01JY
Max. play time: 4h	Dimensions: 3.82×2.76×0.83in

FCC

1. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions:
 (1) This device may not cause harmful interference.
 (2) This device must accept any interference received, including interference that may cause undesired operation.
 2. Changes or modifications not expressly approved by the party responsible for compliance could void the user's authority to operate the equipment.

NOTE: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15 of the FCC Rules. These limits are designed to provide reasonable protection against harmful interference in a residential installation. This equipment generates uses and can radiate radio frequency energy and, if not installed and used in accordance with the instructions, may cause harmful interference to radio communications. However, there is no guarantee that interference will not occur in a particular installation. If this equipment does cause harmful

interference to radio or television reception, which can be determined by turning the equipment off and on, the user is encouraged to try to correct the interference by one or more of the following measures:
 Reorient or relocate the receiving antenna.
 Increase the separation between the equipment and receiver.

Connect the equipment into an outlet on a circuit different from that to which the receiver is connected.
 Consult the dealer or an experienced radio/TV technician for help.

RF warning statement:
 The device has been evaluated to meet general RF exposure requirement. The device can be used in portable exposure condition without restriction.

Read this manual carefully before use, and retain it for future reference.

Principal: Xiaomi Communications Co., Ltd.
 Manufacturer: TiiLab Acoustic Technology (Shenzhen) Co., Ltd. (a Mi Ecosystem Company)
 Address: Tianliao Building F14 East Block (New Materials Industrial Park), Xueyuan Road, Nanshan District, Shenzhen, P.R. China

For further information, please go to www.mi.com